



Hot Melt Adhesives, Equipment, Parts, Repair & Maintenance Service

Axco Adhesive Systems

2401 Eastman Ave. #27
Oxnard, CA 93030

Direct (805) 604-0206
Toll Free (800) 676-2926
Fax (805) 604-0735
www.axco.com

AX753 Hot Melt Applicator


Economical, Efficient and Portable Melt Unit

Performance Features:

- Lightweight, small volume, easy to move.
- Lid opens easily for convenient refills.
- Pneumatic power system, no pumps.
- Easy to maintain.
- Pressure and glue flow are adjustable.
- Fast melting rate.
- Time delay relay for the same amount of glue each time foot pedal is depressed.
- Needle valve nozzle for complete shut off.

Melt Unit Specifications:

- Throat depth: 6.5".
- Electric: 110 volts, 800 watts.
- Weight: 33 pounds.
- 18-1/4" high, 10-1/4" wide, 8-3/8" length.
- Melting capacity: 5-1/2 pounds per hour.
- Tank capacity: 2 pounds.
- Operating Temperature: 200°F. to 500°F.
- Viscosity: Maximum 20,000 CPS.
- Nozzle Orifice: 3 sizes, .040", .080", .125".
- Operating Air Pressure: 40 to 60 PSI

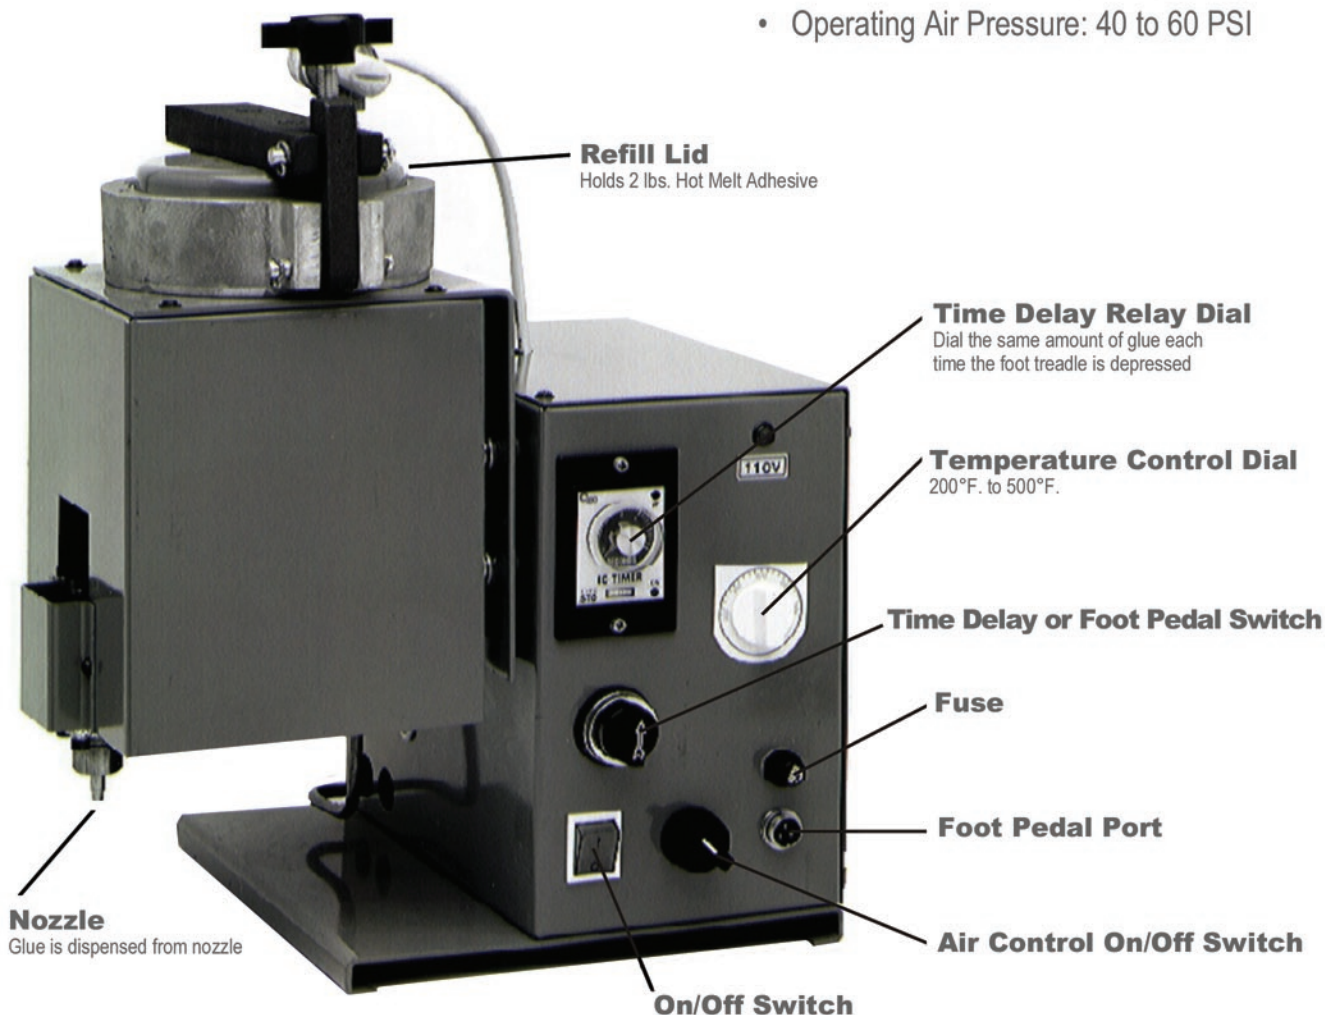

AX753 Hot Melt Applicator